


Parallel-Kinematic Precision Positioning Systems

Six Axes of Motion with Hexapods and SpaceFAB

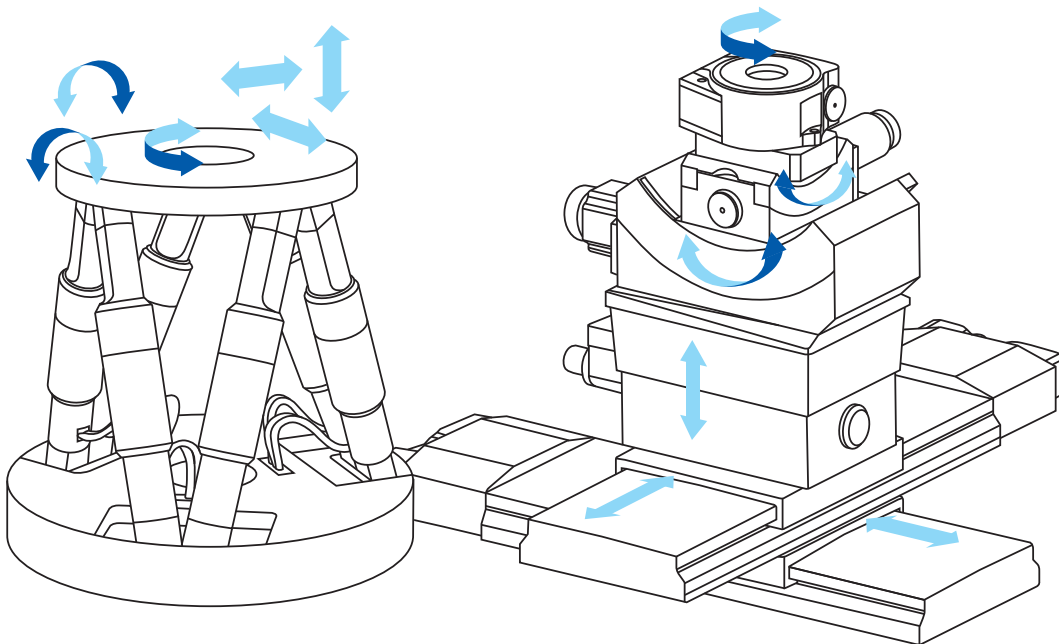

Compact Positioning System with Six Degrees of Freedom

Hexapod platforms are used for moving and precision positioning, aligning and displacing loads in all six degrees of freedom, i.e. three linear and three rotational axes.

Hexapods have a parallel-kinematic structure, i.e. the six drives act together on a single moving platform. The length of the single drives can be changed so that the system moves in all six degrees of freedom in space. This special Hexapod design optimizes the overall system stiffness and allows for a large central aperture.

Precise Positioning Even of Heavy Loads

Depending on their design, Hexapods can position loads from several kg up to several tons in any spatial orientation, in other words independently of the mounting orientation and with submicrometer precision.

Advantages over Serial-Kinematic Design

Hexapods can be designed considerably more compact than serially stacked multi-axis positioning systems. Since only a single platform, most often provided with a large aperture, is actuated, the moving mass of the Hexapod is significantly smaller. This results in improved dynamics with considerably faster response. Furthermore, cabling is no issue, so that no additional forces and torques reduce the accuracy.

In case of stacked systems, the lower axes not only move the mass of the payload but also the mass all other following drives. This reduces the dynamic properties and the total system stiffness. Moreover, the runouts of the individual axes add up to a lower accuracy and repeatability.



Cardanic joints of the H-840 Hexapod model



Ball-and-socket joints

Matching Components for High Precision

The basis is a zero-backlash structure and carefully selected and matching components. This includes first of all the right material selection, when e.g. thermal effects are to be expected at the place of operation. The motor, if necessary with gearhead, an integrated guiding, the leadscrew/nut unit, as well as the joints for the required load range up to high-resolution position detection in every strut – all these elements determine the achievable precision.

Motors and Drives

PI Hexapods are based on electromechanical drives and are much more accurate than the hydraulic Hexapods known from flight or driving simulators. Precision leadscrew drives or piezo linear motors are used. Most systems are self-locking. Direct-drive Hexapods ensure higher velocities; for industrial use, brushless motors (BLDC) are particularly suitable.


The application determines the drive technologies: Hexapods with piezoelectric PiezoWalk® stepping drives are suitable for ultrahigh vacuum applications and can also be operated in very strong magnetic fields.

Joints

Hexapods for precision positioning often have Cardanic joints with two orthogonally arranged axes. This is the optimum combination of two degrees of freedom and the stiffness of the structure.

Ball-and-socket joints offer more degrees of freedom in a relatively simple design. However, the overall stiffness and precision in case of external loads and torque can suffer. A compensating preload is recommended but requires drives with high output forces such as the NEXLINE® piezomotor drives.

If the highest precision and few linear bending displacements and angles are required, flexure joints are recommended. They exhibit neither friction nor backlash and do not require lubricants.

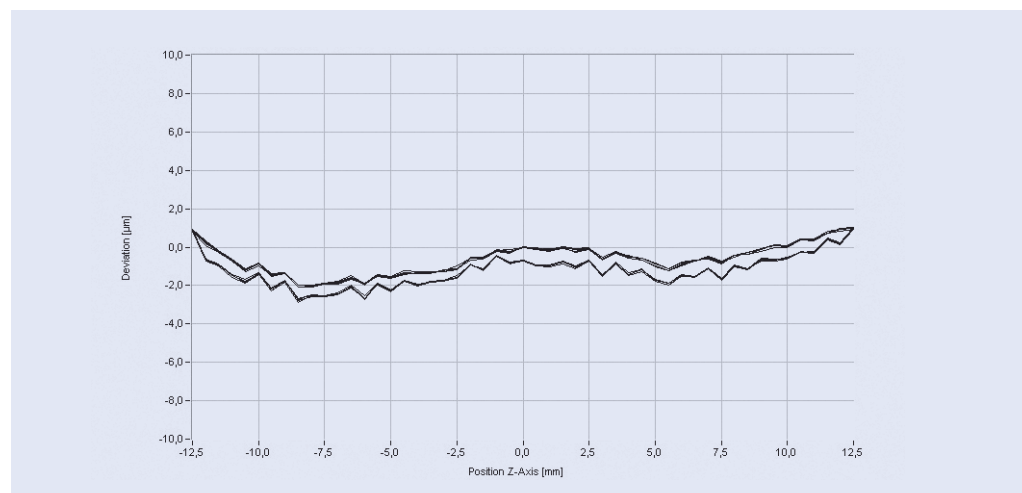

The positioning accuracy of a precision H-824 Hexapod in Z direction over the complete travel range of 25 mm is a few micrometers, and the repeatability is considerably below $\pm 0.1 \mu\text{m}$



Headquarters

GERMANY

Physik Instrumente (PI) GmbH & Co. KG
 Auf der Roemerstrasse 1
 76228 Karlsruhe
 Phone +49 721 4846-0
 Fax +49 721 4846-1019
 info@pi.ws
 www.pi.ws

PI miCos GmbH
 Freiburger Strasse 30
 79427 Eschbach
 Phone +49 7634 5057-0
 Fax +49 7634 5057-99
 info@pimicos.com
 www.pi.ws

PI Ceramic GmbH
 Lindenstrasse
 07589 Lederhose
 Phone +49 36604 882-0
 Fax +49 36604 882-4109
 info@piceramic.com
 www.piceramic.com

© Physik Instrumente (PI) GmbH & Co. KG

All contents, including texts, graphics, data etc., as well as their layout, are subject to copyright and other protective laws. Any copying, modification or redistribution in whole or in parts is subject to a written permission of PI.

Although the information in this document has been compiled with the greatest care, errors cannot be ruled out completely. Therefore, we cannot guarantee for the information being complete, correct and up to date. Illustrations may differ from the original and are not binding. PI reserves the right to supplement or change the information provided without prior notice.

Subsidiaries

USA (East) & CANADA

PI (Physik Instrumente) L.P.
 Auburn, MA 01501
 www.pi-usa.us

USA (San Francisco Bay Area)

PI (Physik Instrumente) L.P.
 Sausalito, CA 94965
 www.pi-usa.us

ITALY

Physik Instrumente (PI) S. r. l.
 Bresso
 www.pionline.it

FRANCE

PI France SAS
 Aix-en-Provence
 www.pi.ws

JAPAN

PI Japan Co., Ltd.
 Tokyo
 www.pi-japan.jp

CHINA

Physik Instrumente (PI Shanghai) Co., Ltd.
 Shanghai
 www.pi-china.cn

SOUTHEAST ASIA

PI (Physik Instrumente) Singapore LLP
 Singapore
 www.pi-singapore.sg
 For ID / MY / PH / SG / TH / VNM

KOREA

PI Korea Ltd.
 Seoul
 www.pikorea.co.kr

USA (West) & MEXICO

PI (Physik Instrumente) L.P.
 Irvine, CA 92620
 www.pi-usa.us

UK & IRELAND

PI (Physik Instrumente) Ltd.
 Cranfield, Bedford
 www.physikinstrumente.co.uk

NETHERLANDS

PI Benelux B.V.
 Sint-Oedenrode
 www.pi.ws/benelux

SPAIN

Micos Iberia S.L.
 Vilanova i la Geltrú
 www.pimicos.es

PI Japan Co., Ltd.
 Osaka
 www.pi-japan.jp

Physik Instrumente (PI Shanghai) Co., Ltd.
 Beijing
 www.pi-china.cn

TAIWAN

Physik Instrumente (PI) Taiwan Ltd.
 Taipei
 www.pi-taiwan.com.tw